



item number	for width of cable tray	for height of cable tray	A	thickness of metal sheet	weight kg/ps	amount of bolts for connection	🔥
<b>NO 45X50X62_S</b>	62	50	125	0,7	0,21	4	🔥
<b>NO 45X50X62_F</b>					0,23		
<b>NO 45X50X125_S</b>	125	50	151	0,7	0,29	4	🔥
<b>NO 45X50X125_F</b>					0,33		
<b>NO 45X50X250_S</b>	250	50	203	0,7	0,53	4	🔥
<b>NO 45X50X250_F</b>					0,69		
<b>NO 45X100X125_S</b>	125	100	151	0,7	0,45	8	🔥
<b>NO 45X100X125_F</b>					0,48		
<b>NO 45X100X250_S</b>	250	100	203	0,7	0,69	8	🔥
<b>NO 45X100X250_F</b>					0,89		
<b>NO 45X100X500_S</b>	500	100	307	0,7	1,43	8	🔥
<b>NO 45X100X500_F</b>					1,88		

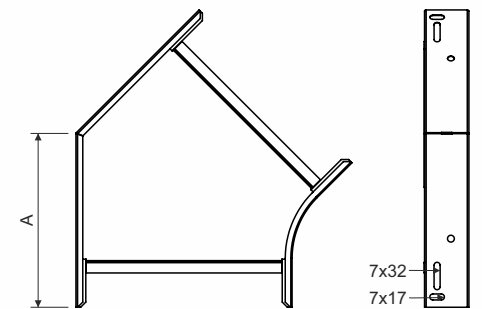

product description:

The elbow 45° is used to bend cable trays running through MARS cable trays by 45° in a horizontal direction.

To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

A bolt with a GMT surface finish is used for a tray with an F surface finish.

These items can also be ordered in a varnished version.

surface finish:

S - Pre-Galvanized, zinc-layer 15 - 27 µm  
F - Hot Dip Galvanized, zinc-layer 45 µm (min. 35 µm)

sales amount:

à 1 pc

meets the requirements:

EN 61537:02

classification 🔥:

ČSN 73 0895 P 90-R  
DIN 4102-12 E 90  
STN 92 0205 PS 90  
Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire  
🔥 products are approved for non-standard constructions

storage:

ČSN EN 60721-3-1

